


POLYETHYLENE EXTRUSION FOR EXPANSION JOINT

Polyfoam expansion joint is used in the construction industry to isolate slabs, walls and concrete walls like columns or drainage pipes.

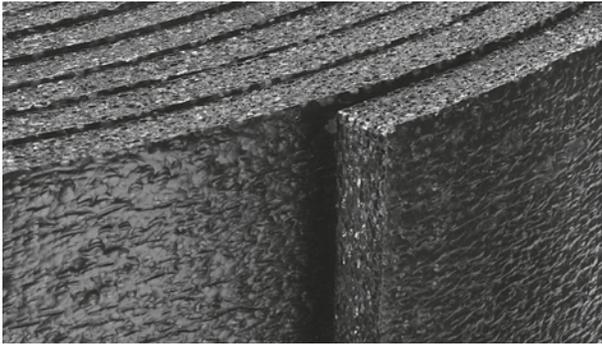


BENEFITS

- Low-cost equipment
- Special equipment not needed for its installation
- Easy to handle
- Prevents repair costs
- 100% waterproof
- Available in a variety of lengths and thicknesses
- Immediate availability in standard measurements
- Excellent resilience material

APPLICATIONS

- * CONCRETE SLAB
- * WALLS
- * COLUMNS

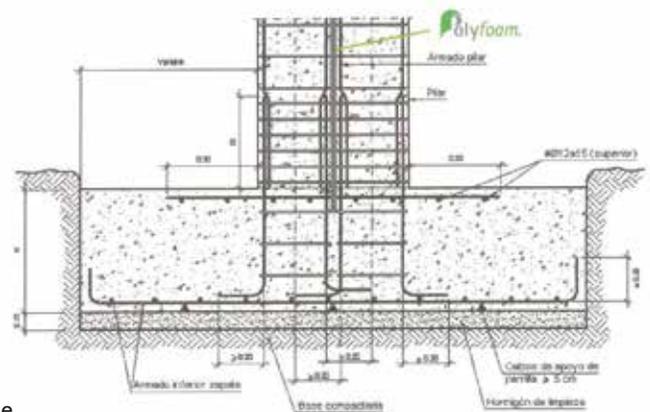

Prevent potential destructive force of concrete, producing damage to himself, we must provide a wide board of intervals that are sealed with Polyfoam®.

Material that can expand and contract with concrete movement, but at the same time it is waterproof, long-term lasting and does not allow any foreign material go between the boards.


- Easy manufacturing
- Regains shape after being subjected to compression
- Closed cell construction



TECHNICAL ROLL

Parameters Parámetros	Unit of measurement Unidad de medida	Measurement tool Instrumento de medición	Values / Valores	
			Min	Max
Thickness Espesor	Thou Milímetros	Micrometer Micrómetro	450 11.4	550 13.9
Width Ancho	inches Metros	Flexometer Flexómetro	48 1.22	49.6 1.26
Length Longitud	Feet Metros	Automatic timer Contador automático	98.4 30	101.7 31
Density Densidad	Lb/ ft ³ kg/ m ³	NMX -C- 125	3.3 52.1	+/- 10% +/- 10%

They can manufacture special sizes according to the project

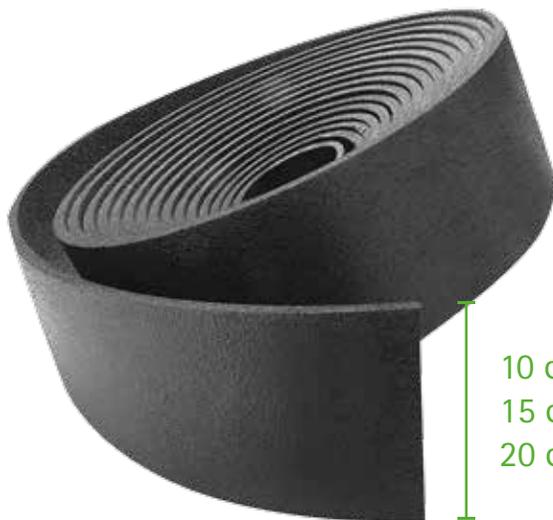

10 cm
15 cm
20 cm

Widths
available

THE SOLUTION WITH THE BEST PERFORMANCE

The walls and columns, which are located in its own foundations, are deeper than the subsoil of slab, it does not move in the same manner as it does when a slab is reduced or expanded by aridity and temperature changes, or as when the subsoil is compressed a little.

Polyfoam cushions these changes by avoiding the fracture of the concrete slab.

As a manufacturer specialist of polyethylene foam we have registered the commercial trademark polyfoam looking to identify it easily in the market, in addition to granting a unique business identity that thanks to the quality and prestiges of the company, it has become the reference name for requesting this material.

Our distributors are the only authorized to advertise our brand in the market.

Distributed by:

Technical Information and distributed:
 Carretera México Toluca # 5324, Col. El Yaqui
 Delegación Cuajimalpa, México D.F. 05320
 Tel: 52 (55) 5255 6000 ext. 405 al 407
 Fax: (55) 5250 8527,
 USA: (281) 576 1611
 Contact: info@polyglobal.com.mx

www.polyglobal.com.mx

